

Automatic flush bolt OLDA 33 HZA-10F type 1



Function:

Automatic, single action flush bolt for spring-loaded bolting of passive door leaf in double doors.

Features:

OLDA 33 HZA-10F is bolted and unbolted automatically, has bolt diameter 12 mm, backset 10 mm and forend width 24 mm.

OLDA 33 HZA-30F, a version with backset 30 mm is also available.

Usage:

Recessed into door of steel or aluminium profiles, lower left and upper right, at the edge of passive door leaves.

Installation:

Fitted recessed at the edge of the door, either flush with cut-out or without cut-out for the forend.

Fixed with two countersunk 3.5 x 6.5 mm screws.

Accessories:

Lock tube LT 12 (17x13) is fastened with two countersunk 3.5 x 16 mm screws. Strike plate SP 20 is fastened with two countersunk 4.2×16 mm screws.

Specification:

- Automatic, single action and spring-loaded bolt function
- Bolt:

length: 32 mmdiameter: 12 mmprojection: 16 mm

o adjustability: -8/+10 mm

Rectangular stainless steel forend

Product:

o width: 24 mm

o height: 193 + 68 mm

o depth: 22 mm

o forend thickness: 2 mm

Backset including forend: 12 mm

• Material: steel

Coating: electrozinc plating

Related products:

Automatic flush bolts

OLDA 33 HZA-10F

o OLDA 33 HZA-10F

Complementary products:

Stainless steel dust-excluding floor sockets FS 12/15 for screw fitting, and FS R12/R15 versions mainly intended to be glued directly into the floor.

Service:

Function & system tests are recommended once or twice a year. Test, lubricate and adjust moving parts as needed.


In harsh environments or high frequent use should tests be made more often.


Warranty:

All mechanical "OLDA" branded products have a 36-month factory warranty



Automatic flush bolt OLDA 33 HZA-10F type 1

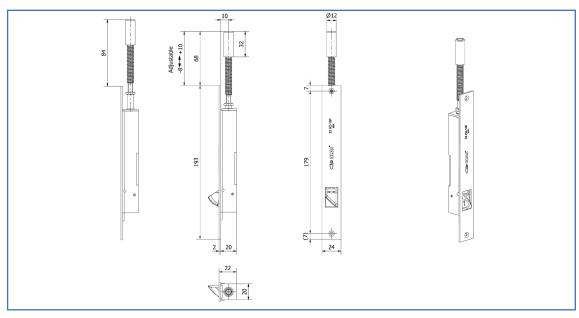

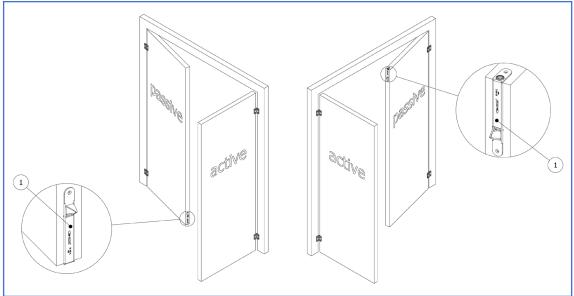

Product documents:

- Dimensions
- <u>Installation with forend cut-out</u>
- Installation without forend cut-out

Product views - 2D:

- PDF
- DXF
- DWG

Product models - 3D:

- STEP
- DWG
- <u>PDF − 3D</u>

OLDA product links:

- Automatic flush bolt 33 HZA-10F
- Flush bolt accessories
- OLDA flush bolt guide
- OLDA fittings school