

Automatic frame bolt OLDA 602 HZA type 2



Function:

Automatic, single action frame bolt for non-spring-loaded bolting of passive door leaf in double doors.

Features:

OLDA 602 HZA is bolted and unbolted automatically, and has bolt diameter 14 mm, forend width 24 mm and 100 mm c/c distance between bolt and latch.

It works like a regular flush bolt with a minimal door leaf, simplified fitting and enhanced fire-proof security as main advantages.

A version with 60 mm c/c distance, OLDA 600 HZA, is also available.

Usage:

To be recessed into steel- and aluminium frames with a left passive door leaf, in particular if fire requirements are strict.

Installation:

OLDA 602 HZA is fitted recessed in the door frames above the door leaves, either flush with cut-out or without cut-out for the forend.

Fixed with two countersunk 4 x 20 mm screws.

Accessories:

Lock tube LT 14 (17x15) is fastened with two countersunk 3.5 x 16 mm screws. Strike plate SP 20 is fastened with two countersunk 4.2 x 16 mm screws.

Specification:

- Automatic, single action and non-spring-loaded bolt function
- Bolt:
 - diameter: 14 mm
 - projection: 25 mm
 - adjustability: - 2 / + 2 mm
- Round stainless steel forend
- Product:
 - width: 24 mm
 - height: 200 mm
 - depth: 40.5 mm
 - forend thickness: 2.5 mm
 - c/c bolt and latch: 100 mm
- Material:
 - steel
 - stainless steel (bolt & forend)
- Coating: electrozinc plating

Related OLDA frame bolts:

- Automatic frame bolts
 - 600 HZA
 - 602 HZA

Service:



Function & system tests are recommended once or twice a year. Test, lubricate and adjust moving parts as needed.

In harsh environments or high frequent use should tests be made more often.

Warranty:

All mechanical "OLDA" branded products have a 36-month factory warranty.

Automatic frame bolt OLDA 602 HZA type 2

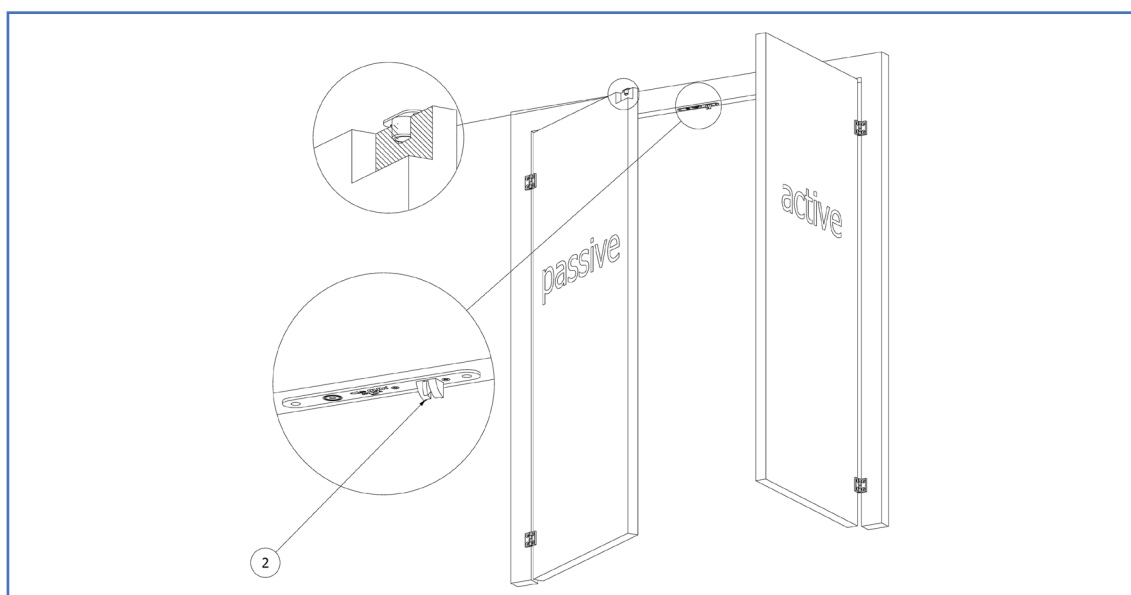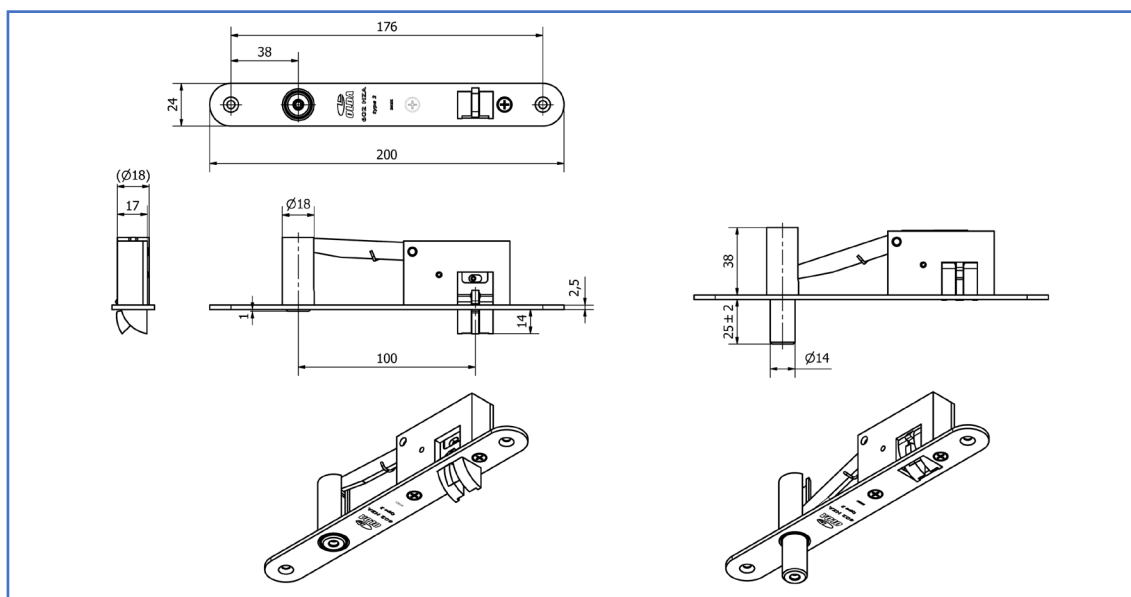

Product documents:

- [Dimensions](#)
- [Installation with forend cut-out](#)
- [Installation without forend cut-out](#)

Product views – 2D:

- [PDF](#)
- [DXF](#)
- [DWG](#)

Product models – 3D:

- [STEP](#)
- [DWG](#)
- [PDF – 3D](#)

OLDA product links:

- [Automatic frame bolt 602 HZA](#)
- [Flush bolt accessories](#)
- [OLDA flush bolt guide](#)
- [OLDA fittings school](#)