

## Round dust excluding floor socket OLDA FS R15



### Function:

Commonly used when flush bolts are mounted at the bottom, to prevent grit and dust to obstruct correct locking of the bolt.

### Features:

OLDA FS R15 has 22 mm stroke length, for stronger locking and adaptation for flush bolts in connection with automatic drop seals, Ø 16 mm spring loaded opening which fit bolts between Ø 10 – 15 mm.

Made in stainless steel for longer life.

### Usage:

Recommended to secure the function and increase the life span of bolts, especially in doors with high frequency of passage.

Dust excluding floor sockets provide safe and strong locking of both automatic and manual flush bolts.

They are commonly used together with other types of bolts such as espagnolettes or locking of folding doors.

### Installation:

OLDA FS R15 is glued in solid floors made of tile, marble, stone and wood, but also aluminium and steel, which gives a flexible adaptation to the bolt.

The casing grooves ensure a firm floor assembly, and the solid bottom prevents glue penetrating, thereby guaranteeing the internal spring function.

The outer diameter is 22 mm and total height is 50 mm, with a visible height of 2 mm with the forend fixed on top of the sill/floor.

Mounting bracket OLDA FS R30 allows FS R12 to be screwed into a wooden sill or a wooden floor.

### Specification:

- Stroke length: 22 mm
- Spring loaded opening: Ø 16 mm
  - fit bolts Ø 10 – 15 mm
- Product:
  - outer diameter: 22 mm
  - height: 50 mm
  - forend: Ø 30 x 2 mm
- Material:
  - stainless steel
  - stainless steel spring

### Related products:

- Floor socket FS 12
- Floor socket FS 15
- Round floor socket FS R12
- Round floor socket FS R15
- Mounting bracket FS R30, designed for FS R12/R15

### Service:


Function & system tests are recommended once or twice a year. Test, lubricate and adjust moving parts as needed.

In harsh environments or high frequent use should tests be made more often.

### Warranty:

All mechanical “OLDA” branded products have a 36-month factory warranty.

### Round dust excluding floor socket OLDA FS R15

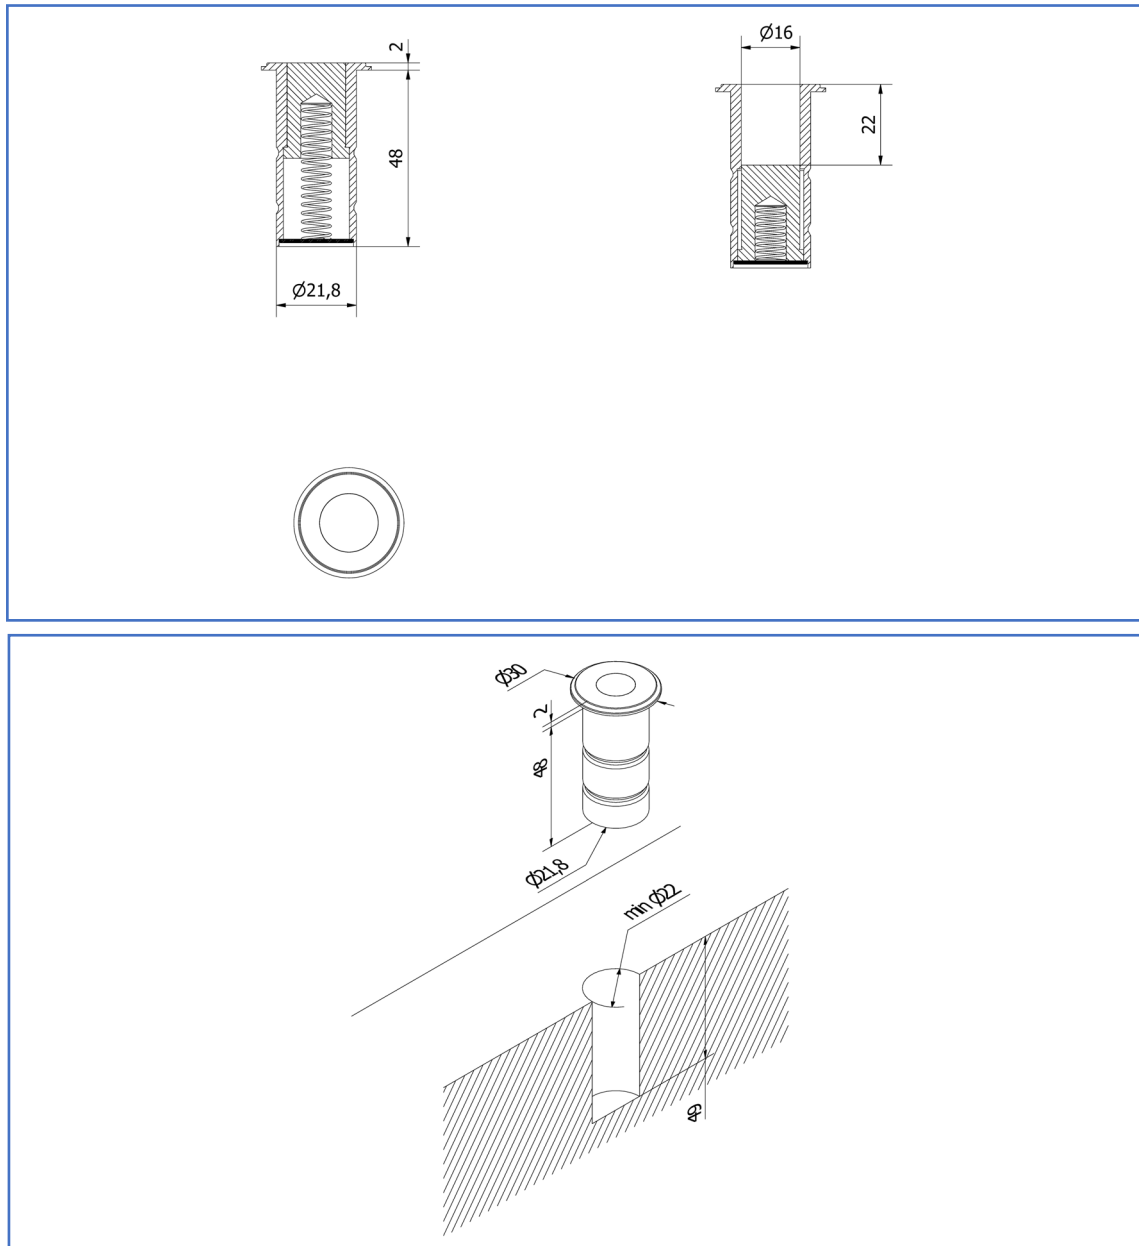

#### Product documents:

- [Dimensions](#)
- [Installation](#)

#### Product views – 2D:

- [PDF](#)
- [DXF](#)
- [DWG](#)

#### Product models – 3D:

- [STEP](#)
- [DWG](#)
- [PDF – 3D](#)

#### OLDA product links:

- [Floor socket OLDA FS R](#)
- [Flush bolt accessories](#)
- [OLDA flush bolts](#)
- [OLDA fittings school](#)