

Automatic frame bolt OLDA 602 HZA type 1



Function:

Automatic, single action frame bolt for non-spring-loaded bolting of passive door leaf in double doors.

Features:

OLDA 602 HZA is bolted and unbolted automatically, and has bolt diameter 14 mm, forend width 24 mm and 100 mm c/c distance between bolt and latch.

It works like a regular flush bolt with a minimal door leaf, simplified fitting and enhanced fire-proof security as main advantages.

A version with 60 mm c/c distance, OLDA 600 HZA, is also available.

Usage:

To be recessed into steel- and aluminium frames with a right passive door leaf, in particular if fire requirements are strict.

Installation:

OLDA 602 HZA is fitted recessed in the door frames above the door leaves, either flush with cut-out or without cut-out for the forend.

Fixed with two countersunk 4 x 20 mm screws.

Accessories:

Lock tube LT 14 (17x15) is fastened with two countersunk 3.5 x 16 mm screws. Strike plate SP 20 is fastened with two countersunk 4.2×16 mm screws.

Specification:

- Automatic, single action and nonspring-loaded bolt function
- Bolt:

diameter: 14 mmprojection: 25 mm

o adjustability: -2/+2 mm

- Round stainless steel forend
- Product:

width: 24 mmheight: 200 mmdepth: 40.5 mm

forend thickness: 2.5 mmc/c bolt and latch: 100 mm

- Material:
 - o steel
 - stainless steel (bolt & forend)
- Coating: electrozinc plating

Related OLDA frame bolts:

- Automatic frame bolts
 - o 600 HZA
 - o 602 HZA

Service:

Function & system tests are recommended once or twice a year. Test, lubricate and adjust moving parts as needed.


In harsh environments or high frequent use should tests be made more often.


Warranty:

All mechanical "OLDA" branded products have a 36-month factory warranty.



Automatic frame bolt OLDA 602 HZA type 1

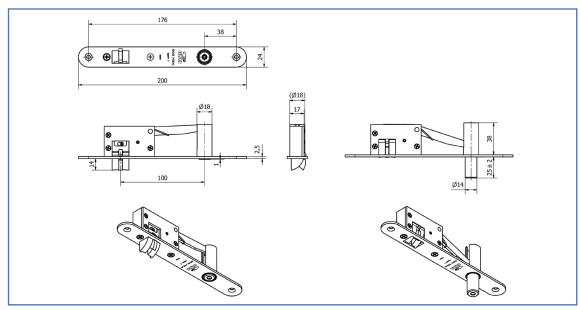

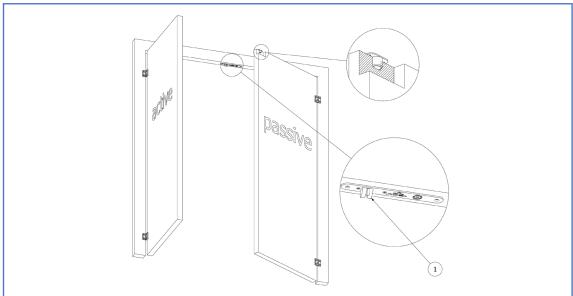

Product documents:

- Dimensions
- <u>Installation with forend cut-out</u>
- Installation without forend cut-out

Product views - 2D:

- PDF
- DXF
- DWG

Product models - 3D:

- STEP
- DWG
- PDF 3D

OLDA product links:

- Automatic frame bolt 602 HZA
- Flush bolt accessories
- OLDA flush bolt guide
- OLDA fittings school